

FEATURES

- Bimetal helix system
- Hermetically sealed
- Elbow mounting
- External zero adjustment

APPLICATION

- Liquid & gaseous mediums
- Corrosive environments
- Oil & Gas applications
- Chemical & Petrochemical
- Food & Beverages
- Nuclear power plants

Elbow mounting



STANDARD PARAMETERS

Accuracy	: CL 1.0 (Class 1)
Ambient temperature	: -20...+60°C
Over range limits	: 110% full scale
Stem pressure rating	: 25 bar (Without thermowell)
Weld joints	: TIG argon arc welding

MATERIAL OF CONSTRUCTION

Sensing element	: Coiled bimetal strip
Case & Ring material	: AISI 304 SS
Stem & Process connection material	: AISI 316 SS
Dial	: Aluminum, black graduation on white background
Pointer	: Slotted zero adjustable, aluminum, black powder coated
Gaskets	: Neoprene
Window	: Sheet glass

STANDARD SPECIFICATIONS

Dial size	: DN100
Range	: 0...100°C
Mounting pattern	: Elbow mounting, Bottom connection
Stem size	: 6.0 mm
Ingress protection	: IP 65
Zero adjustment	: External
Stem length	: 150 mm
Process connection type	: Adjustable connection
Process connection	: 1/2" NPT (M)

STANDARD SPECIFICATIONS : DAMPENING LIQUID FILLED, GLYCERIN

Gaskets & Filling plugs	: Neoprene
Dampening liquids	: Glycerin 99.7% (-20°C to 65°C) [Up to range 100°C]
Window	: Shatterproof safety glass

STANDARD SPECIFICATIONS : DAMPENING LIQUID FILLED, SILICON


Gaskets & Filling plugs	: NBR
Dampening liquids	: Silicon oil [Up to range 200°C]
Window	: Shatterproof safety glass

REFERENCE

EN 13190

DIMENSIONAL DRAWING

Mounting Pattern: B5

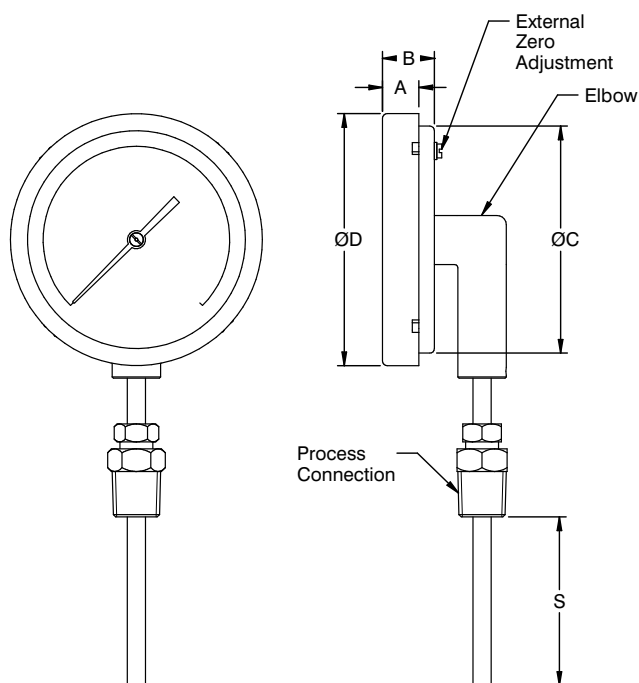

NS	A	B	ØC	ØD	S
100	12	23	100	111	*
125	15	23	118.5	129	*
150	15	23	149	161	*

All dimensions are in mm.

* As per customer requirement.

RANGE TABLE

RANGE	" °C "	RANGE	" °C "	RANGE	" °C "
-20...+40	C01	0...50	C13	0...200	C20
-20...+60	C02	0...60	C14	0...250	C21
-30...+70	C08	0...80	C15	0...300	C22
-30...+120	C05	0...100	C16	0...400	C23
		0...120	C17	0...500	C24
		0...150	C18	0...600	C25

NOTES

1. For other ranges, please contact factory.
2. Equivalent scales available in °F, °C/°F, °F/°C. Please contact factory for details.

ORDERING CODES

1. DIAL SIZE

04	100 mm / 4"
05	125 mm / 4½"
06	150 mm / 6"

2. RANGE

XXX	Refer "Range Table"
------------	---------------------

3. MOUNTING PATTERN

B5	Elbow mounting (Bottom connection)
-----------	------------------------------------

4. STEM DIAMETER

M60	6.0 mm
I14	¼" (6.35 mm)
M80	8.0 mm
M95	9.5 mm
M10	10 mm
M12	12 mm

5. INGRESS PROTECTION

ER	IP 65
ES	IP 66
ET	IP 67
EU	Hermetically sealed

6. STEM LENGTH

XXXX	Up to 1,500 mm
-------------	----------------

7. PROCESS CONNECTION TYPE

KX	Fixed connection
KW	Adjustable connection
BW	Swivel / Revolving connection

8. PROCESS CONNECTION

14N	½" NPT (M)
14B	½" BSP (M)
12N	¼" NPT (M) ²
12B	¼" BSP (M) ²
14M	M20 X 1.5 mm (M)
13B	3/8" BSP (M) ³
T15	1.5" Triclover
15N	¾" NPT (M)
15B	¾" BSP (M)

9. OTHER OPTIONS

BF	Case & Ring in AISI 316 SS (B5)
GC	Shatterproof safety glass
TA	5 - point factory calibration certificate
TM	Material test certificate 2.2
XF	SS tag plate, AISI 304 SS
XG	SS tag plate, AISI 316 SS
XT	Dial tag marking
XR	Custom designed dial

Ordering Example : T503-04-C16-B5-M60-ER-150-KW-14N



Add: Premier Total Solution Co., Ltd.
 594, 596 Soi Rama 2 Soi 60,
 Samaedam, Bangkhuntien,
 Bangkok 10150 Thailand
 Tel : 02-4155818-20
 E-mail : info@ptssolution.com
 Web : www.ptssolution.com
 Facebook : DiaphragmSeal

NOTES

1. For other connections, please contact factory.
2. 1/4" connections are available up to 1/4" (6.35 mm) stem diameter only.
3. 3/8" connections are available up to 10 mm stem diameter only.